








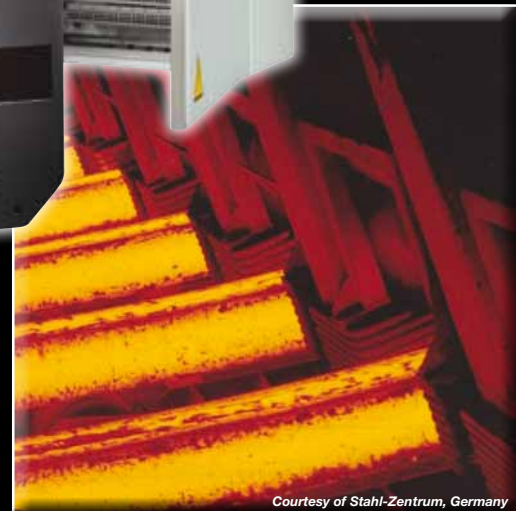

# ScanIR<sup>®</sup>3

Linescanning Infrared Thermometer and Thermal Imaging System



S310	S320	S330	S335	S339	S343	S344	S350
600 to 1200°C 1.0 µm	400 to 950°C 1.6 µm	20 to 350°C 3-5 µm	100 to 650°C 3.5-4.0 µm	100 to 800°C 3.9 µm	30 to 250°C 3.43 µm	100 to 350°C 3.43 µm	100 to 950°C 5 µm
Hot strip mills, plate mills and continuous casting	Galvanizing lines, Non ferrous metal hot strips, continuous casting	Printing, coating, laminating, food, drying/curing, thermoforming, textiles, plaster board, paint curing, carpeting, and flooring	Kiln shell temperatures, hot clinkers, hot spot detection on conveyor belts	Heat treating, ore processing	Extrusion and converting of polyethylene, polypropylene and polystyrene thin films	Extrusion and converting of polyethylene, polypropylene and polystyrene thin films	Glass temperature measurement for tempering, bending and annealing
							

## ScanIR®3 Linescanner with ScanView™ Pro Software

The ScanIR3 Linescanner Series is a family of advanced infrared linescanners that provides accurate, real-time, thermal imaging for a wide variety of industrial applications, including continuous sheet and web-based processes, as well as discrete manufacturing processes. The ScanIR3 series is designed for reliability and continuous operation in harsh industrial environments.

The ScanIR3 robust housing includes built-in provisions for water-cooling and air-purge, and features built-in laser sighting. A rugged processor box provides universal input and output capabilities in the field without the need for an external computer.

The ScanIR3 linescanner is surprisingly easy-to-install and manage. One bundled sensing head cable allows for fast and easy installation.

Versatile ScanView Pro software allows custom configuration of ScanIR3 operating parameters, and display of thermal images and temperature profiles on a standard PC.

### Features

- Fast scan speed up to 150 lines per second
- Up to 1024 measurement points per line
- High optical resolution up to 200:1
- PC independent input/output capabilities
- Reliable Ethernet Communication (optional fiber optics)
- Rugged, waterproof housing with built-in laser
- Reliable brushless scanning motor
- Field-replaceable window
- Built-in air purge and water cooling as standard
- One bundled sensing head cable with one-click connector to the scanner

## General Specifications

<b>Environmental Rating</b>	IP65 (IEC 60529)
<b>Ambient Operation Temperature</b>	without water-cooling 0 to 50°C with water-cooling (integrated) 180°C maximum with internal heater (optional) -40°C minimum
<b>Internal Operating Temperature</b>	0 to 60°C
Laser	automatic switch OFF at < 5°C or > 50°C
<b>Storage Temperature</b>	-25 to 65°C
<b>Relative Humidity</b>	10 to 90%, non-condensing
<b>Shock</b>	IEC 60068-2-27, 3 axes, operating 5 g @11 ms, 15 g at 6 ms
<b>Vibration</b>	IEC 60068-2-6, 3 axes, 10 to 150 Hz, operating 2 g above 20 Hz
<b>Scan Motor</b>	MTBF: 40,000 hours
<b>Water Cooling/Air Purge</b>	standard feature
maximum water pressure	15 bar
maximum air pressure	3 bar
<b>CE Conformance</b>	EN61010-1: 1993/A2: 1995 EN61326-1, EN60825-1

## Measurement Specifications

<b>Optical Scan Rate</b>	20 to 150 Hz
<b>Response Time</b>	20 ms
<b>Field of View</b>	90°
<b>Focus</b>	1.52 m standard, custom focuses available
<b>Emissivity</b>	0.1 to 1.0 digitally adjustable
<b>Samples</b>	256 per scan line up to 150 Hz 512 per scan line up to 80 Hz 1024 per scan line up to 40 Hz
<b>Signal Processing</b>	Max, Min, AVG, Peak/Valley Hold, Alarm set points

## Electrical Specifications


<b>Processor Box Outputs</b> (11 module max. per box)	
Analog	0-20 mA, 4-20 mA or 0-10 V 16 bit resolution, 2 channels per module
Digital	24 VDC switching 16 channels per module
Relay	Potential free, closing contacts 2 channels per module
<b>Inputs</b>	Trigger, laser switching, system functions
<b>Ethernet Communication</b>	TCP/IP protocol 10/100 Mbit/s
<b>Power</b>	100-240 VAC, 44/66 Hz
<b>Warm-up Time</b>	30 minutes
<b>Environmental rating</b>	IP65 (IEC 60529)
<b>Ambient Operation Temperature</b>	0 - 50°C

## Imaging

Real-time thermal imaging is provided by ScanView™ Pro software for temperature monitoring, display and analysis. With ScanView Pro software, you can quickly detect a hot spot or non-uniformity before it becomes a problem.

The ScanView Pro software provides features to subdivide thermal images from the ScanIR3 linescanner into portions of specific interest. Temperatures in each portion can be processed for certain math functions, like average, maximum or minimum temperatures. In case of a thermal defect, the software triggers an alarm.

For interfacing with other control systems, temperatures are available as current or voltage analog outputs by virtue of the analog output modules provided as an option with the processor box. No PC is necessary to provide these outputs.

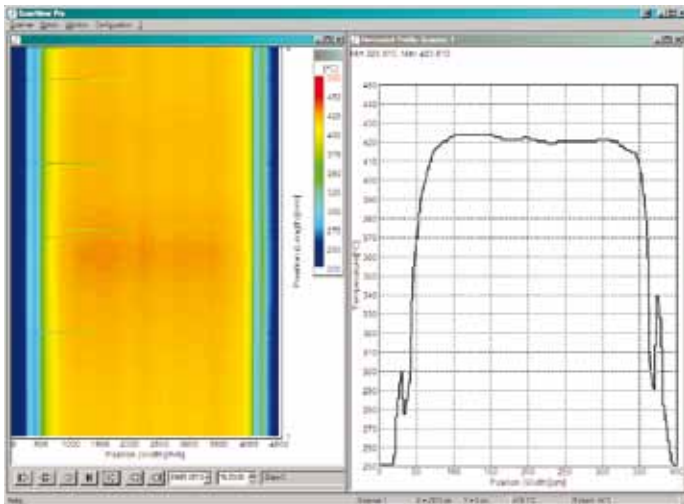


## ScanView Pro Features

- View two-dimensional thermal images, temperature profiles and differential images
- Define product-specific configurations
- Analyze temperatures automatically (Minimum, Maximum and Average)
- Fail-safe alarm logging
- Define a reference image display
- Playback stored thermal images as a movie
- System interfaces include analog/digital output modules, OPC or DDE server, or a serial COM port
- Supports multiple ScanIR3 linescanners
- Specify security passwords and access levels
- Multiple language support

## Edge-to-edge Temperature Measurement


Unlike point sensors that measure a single point, the ScanIR3 scanner measures multiple temperature points across a scan line. The ScanIR3 motorized mirror scans at rates up to 150 lines per second. The faster scan rate allows rapid detection of temperature non-uniformities and hot spots. Rotating optics collect infrared radiation at 1024 points within a 90° field of view. A two-dimensional image is formed as the material moves across the ScanIR3 linescanner's field-of-view.

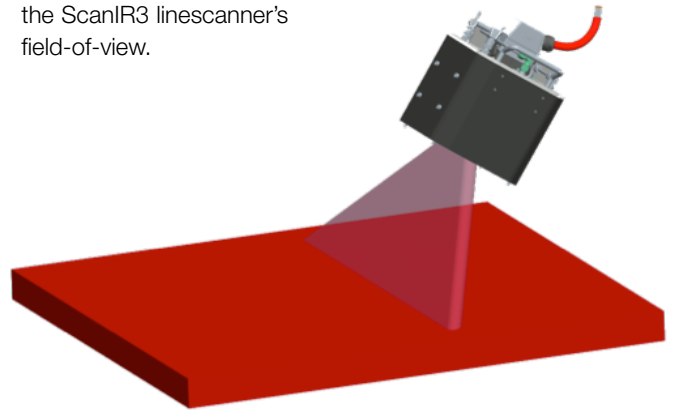

## ScanIR3 High Temperature Enclosure

- High temperature enclosure for the ScanIR3 linescanner withstands process temperatures up to 1090°C
- Modular system with choice of cooling options allows users to configure to suit their application
- Rugged stainless steel construction
- Integrated shutter for fail-safe operation



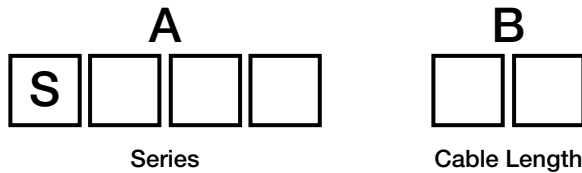

Block A	Temperature Range	Spectral Range	Optical Resolution (measured at focal point)	Primary Applications
S310	600-1200°C	1.0 µm	D/200	Hot strip mills, plate mills and continuous casting
S320	400-950°C	1.6 µm	D/200	Galvanizing lines, non ferrous metal hot strips, continuous casting
S330	20-350°C	3-5 µm	D/170	Printing, coating, laminating, food, drying/curing, thermoforming textiles, plaster board, paint curing, carpeting and flooring
S335	100-650°C	3.5-4.0 µm	D/170	Kiln shell temperatures, hot clinkers, hot spot detection on conveyor belts
S339	100-800°C	3.9 µm	D/170	Heat treating, ore processing
S343	30-250°C	3.43 µm	D/33	Extrusion and converting of polyethylene, polypropylene and polystyrene thin films
S344	100-350°C	3.43 µm	D/75	Extrusion and converting of polyethylene, polypropylene and polystyrene thin films
S350	100-950°C	5 µm	D/170	Glass temperature measurement for tempering, bending and annealing

#### Block B Cable Length

10	10 m
15	15 m
20	20 m
25	25 m
30	30 m

## Accessories

<b>S3X-Basic Kit</b>	Basic Kit to mount one or more selected outputs to the Processor Box <i>Please Note: The Basic Kit accessory must be ordered with the ScanIR3 linescanner.</i>	<b>S3X-RMB</b>	Adjustable Rugged Mounting Base, scanner mounting plate included
<b>S3X-16DI-I</b>	Digital In (16 each)	<b>S3X-ENC</b>	Enclosure and Base Stainless steel enclosure with mounting base and integrated fail safe shutter (Includes internal cold plates, grommet plates for cooling water.)
<b>S3X-16DO-I</b>	Digital Out (16 each)	<b>S3X-ENCIS</b>	Insulating Shield Stainless steel envelope with a high performance refractory core.
<b>S3X-2AOC0-I</b>	Analog Out Current (2 each), 0–20 mA	<b>S3X-ENCWCS</b>	Water-Cooled Shield Stainless steel high performance water shield. A 25 mm (1") water inlet and outlet permit high flow rates and extremely high heat removal capability.
<b>S3X-2AOC4-I</b>	Analog Out Current (2 each), 4–20 mA		
<b>S3X-2AOV-I</b>	Analog Out Voltage 0-10 V (2 each)		
<b>S3X-2R-I</b>	Relay (2 each)		
<b>S3X-2A-ISO-I</b>	Passive current isolation		
<b>S3X-LWL-I</b>	Fiber Optic/RJ45 Converter		
<b>S3X-FSISO</b>	Fitting Set Cooling (ISO)		
<b>S3X-FSNPT</b>	Fitting Set Cooling (NPT)		

## The Worldwide Leader in Noncontact Temperature Measurement

### IRCON

**Worldwide Headquarters**  
Santa Cruz, CA USA  
Tel: +1 800 227 8074 (USA and Canada, only)  
+1 831 458 3900  
info@ircon.com

**European Headquarters**  
Berlin, Germany  
Tel: +49 30 4780080  
ircon@ircon.eu

**China Headquarters**  
Beijing, China  
Tel: +8610 6438 4691  
ircon-china-support@fluke.com

To find an IRCON office near you, please visit [www.ircon.com](http://www.ircon.com)

### Worldwide Service

Ircon offers services, including repair and calibration.  
For more information, contact your local office or e-mail [info@ircon.com](mailto:info@ircon.com)

[www.ircon.com](http://www.ircon.com)

